


DeJaVIEW II[®]

Video Capture & Replay System For Sports and Gymnastic Training

Designed to be easy to use, portable, economical and expandable. There are many areas where the NEW *DeJaVIEW II* Timed Video Capture and Replay system can be used. This affordable easy to use system will find applications in Sports and Gymnastic training of all types. Great for Colleges, High Schools and other indoor or outdoor sports training facilities. This system makes it easy to add instant visual feedback and review to any sports training. Everyone agrees that instant video replay is a great tool to improve any athletes training and performance. Makes no difference what sport or activity. If it is baseball put *DeJaVIEW II* in the batting cage or on the pitchers mound. For tennis *DeJaVIEW II* goes anywhere on the court during lessons and practice. Works great for Soccer, Football and Golf too. In the Gym the system is easy to position and can be moved anywhere. The wireless tripod mounted camera and power pack makes it easy to position the camera where the action is.

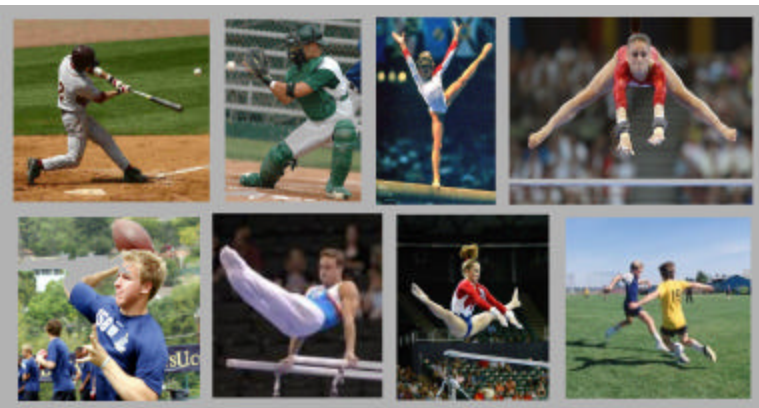

DeJaVIEW II[®] System Features

The basic *DeJa VIEW II* system includes:

- ? 32 " TFT Color LCD Display. Optional displays available up to 60"
- ? Wireless Tripod mounted camera with adjustable mount and Rechargeable DC Power pack. (can be expanded to 4)
- ? High resolution color camera (SONY Super CCD Sensor) Lens has Adjustable High speed shutter with low light capability. Rugged portable design.
- ? Adjustable Video Delay from 0- 60 seconds (optional up to two minutes)
- ? Adjustable height (34" to 52") open shelf cart with locking cabinet. Complete with 4" locking casters. Twin post design display mount.
- ? Ac/Dc power pack with built in charger
- ? Portable DVR Recorder included
- ? Auxiliary video output
- ? Auxiliary 110 volt output
- ? Optional Pole mounted Camera
- ? Optional 4 Camera support
- ? Optional 4 channel DVR w/quad screen

Studies by Professional Sports trainers, Major League Baseball coaches, top Universities and International Sports Training Centers has confirmed that Video Replay training systems work. They aid in rapid improvement and development in any sport or physical activity. The *DeJa VIEW II* Video Systems Patented Delay System lets you play back live video with an adjustable delay or record the action so athletes and trainers can view the performance together. This system has many options and can be configured to match your budget. No complex and expensive software or hardware to use. The *DeJa VIEW II* system is plug and play. Once in position it is ready to go. Point your camera, set the replay time (1-60 seconds) and *DeJa VIEW II* is ready to produce an instant replay of the athletes performance for their review. This gives athletes and trainers a valuable tool for rapid improvement.

All *DeJa VIEW* Systems have a totally sealed rechargeable battery power pack for the display system and the remote wireless camera so they will operate anyplace. When ac power is available the system automatically switches and recharges the battery. Two stage charging allows the battery to be maintained at full charge when running on ac power. The system will run for a minimum of 8 hours on battery power before needing to be recharged. Recharges to full capacity over night and is ready to be used again.



The *DeJa VIEW* wireless camera and tripod allows the camera and base unit to be separated by up to 100 meters. A 8 foot extension camera pole mounted to the base unit is also included. The system optionally can be configured with up to 4 transmitters and receivers a quad display and a 4 channel DVR.

The sturdy steel AV cart has lots of Storage space inside the locking Cabinet. Room for all the accessories like Tripod, Camera and Power Supply to be locked away when not in use. Large locking wheels let you easily roll the system anywhere you want.

The *DeJaVIEW* system controller Mounts neatly in the cabinet and Can be easily removed if service Is ever needed.

The *DeJaVIEW* system controller comes with a five year guarantee. If the system controller should ever fail it can be returned for a replacement.

The *DeJaVIEW* system has it all. Easy to use, competitively priced Expandable, no complex hardware or software to learn, rugged construction, 160GB Digital Video Recorder and high resolution CCD Camera.



DeJaVIEW Camera Specifications	
Image Pick-up Device	1/3" Sony Super HAD CCD
Picture elements	811(H) x 508(V) 410K pixels
Scanning Area	3.65(H) x 2.74(V) mm
Scanning System	2:1 Interlace (NTSC Std) 525 Lines / 60 Fields / 30 Frames
Resolution	540 TV Lines Horizontally
S/N Ratio	More than 50dB (AGC OFF, weight ON)
Video Output	CVBS : 1.0Vp-p / 75Ω
Minimum Illumination	0.3 Lux at F1..2 0.002 Lux (Sens-up x 128)
White Balance	ATW / AWC / Manual (1,800°K ~ 10,500°K)
Electronic Shutter Speed	Auto / Manual (x128 ~ 1/60~1/120,000 sec)/ Flickerless
O.S.D	Built-in
BLC, DNR, GAIN	Low/Middle/High/Off Selectable
Day & Night	Auto / On
Sync	Int / LL Selectable
Mirror	ON / OFF
Operational Temperature	-10°C ~ 50°C(14°F~122°F) 30% to 80% RH
Power Input Voltage	DC 12V ±10% or AC 24V (Dual Power)
Power Consumption	Max 2.0W



DeJa VIEW II LENS OPTIONS

The basic system is supplied with an Auto Iris 2.80-8.0 mm Lens. Two optional lenses are available.

Option 001 = Auto Iris 2.7-13.5 mm

Option 002 = Auto Iris 5.0-50 mm



DeJa VIEWII AV Cart Specifications

- Holds up to a 60" flat panel
- Adjusts from 34" to 54"
- Brackets are twin post design
- Posts 26" H with built in wire conduits
- Four post height adjustments in 1" increments
- Security cabinet 15 1/2" H x 23 1/2" W x 17 1/2" D storage area
- Two side shelves are stored under the shelf when not in use
- 4" swivel casters (2 locking)
- 4-outlet surge-protected electrical assembly with 20' cord and cord winder
- UL/CSA approved
- Ready to assemble
- Limited Lifetime Warranty

Color: Black only

DeJa VIEW II comes with everything you need to produce instant replays and start getting rapid improvement.

DeJa VIEW II Power supply Description

XPowerr PowerSource 400

400 watt power inverter with five 115 VAC power outlets for operating multiple devices simultaneously. Built-in transfer relay provides reliable switching from ac power to battery power. Digital LED display indicates battery capacity status and total wattage of the devices connected to the PowerSource Audible alarm signals 10 minutes before the PowerSource runs out of battery power. Overload and over-temperature protection to ensure longer PowerSource life Sealed, non-spillable 40 amp-hour AGM battery Recharges from any AC wall outlet

DeJaVIEW II Wireless Camera and Tripod Specifications

DeJa VIEW II is supplied with a wireless Camera, Tripod and Rechargeable Power Pack as a standard part of the system. You can move and position your camera up to 100 meters away from the base unit. The Tripod has a 3-way fluid head, 360-degree pan and 2 way tilt, 3 section locking legs, locking leg supports, rubber feet and has light weight durable aluminum construction, carrying case, quick release camera plate and bubble level on base. 11" geared center post with carry hook. and a 10 year warranty. - 2.4GHz Transmitter, 8 Hour operation Rechargeable Power Pack, Carry handle, Non slip adjustable rubber feet, Maximum Height: 60", Minimum Height: 22", Folded Length: 23"



Continuous DVR Recording.



The DeJa VIEW II Stand alone Portable DVR Recorder/ Player comes complete with a wireless remote, all required cables, power supply and software to download the stored Video to a computer using USB 2.0. Easy to use on screen menus allow setup, rewind and replay. The

system supports four main functions. Using the HDD Browser you can play or edit files. HDD Utility allows Hard Drive format. Using setup you can set all the video parameters. Record allows continuous recording. Multimedia 3.5 Inch 160 GB SATA Hard Disk Player/recorder + Card Reader. Video Record Format: MPEG4 AVI Conversion Video Format: MPEG1/2/4, AVI, MPG, Picture Format: JPEG, Motion JPG Video Output: 1 Vp-p+/- S/N Ratio: >85dB. Color System: NTSC, PAL Output: AV OUT Input: AV IN Function Keys: 1 USB: 2.0 System: Windows 98/SE/2000/ME/XP Mac OS9-X Linux 2.4.2 :




Display specifications

Widescreen LCD HDTV
General Features:
Colors vary
32-inch TFT Color LCD display
16:9 widescreen aspect ratio
Integrated ATSC/QAM/NTSC TV tuners
1366 x 768 native resolution
1000:1 contrast ratio
550 cd/m2 brightness
8 ms response time
176-degree horiz and vertical viewing angle
16.7 million colors
480i, 480p, 720p and 1080i video format compatibility
10w x 2 built-in speaker
Progressive Scan
3:2 Pull Down
3D Comb Filter
Sleep Function
V-Chip
Closed Caption
Normal, warm, cool color temperature
VGA input display: 640 x 480, 800 x 600, 1024 x 768 x1280 x 768 x 1360 x 768

Front/Side Panel Features:
LED indicators
Power
Channel +/-
Volume +/-
Source Menu
Rear Connectors:
TV tuner
AV and S-Video inputs
Two (2) HDMI inputs
15-pin VGA and audio inputs
Component 1 & Component 2 Y, PB/Cb, Pr/Cr inputs
AV audio inputs
Power Specifications:
120V, 60Hz, 190W
Unit Dimensions:
23.27 x 31.42 x 8.75-inches (H x W x D)
Regulatory Approvals: FCC
Emprex WT323 32-inch 720p Widescreen LCD HDTV
User's Manual
Remote control with two AA batteries
Power cord

Disclosures:
LCD displays may have cosmetic imperfections that appear as small bright or dark spots. This is common to all LCD displays used in products by all vendor and is not specific to any vendor or brand. Below are the acceptable amounts of "dot defects" for LCD displays that we sell:
30-Inch to 32-Inch:
Total Defects: 8
Bright or Dark Dots (random): 4
Bright or Dark Dots (2 adjacent): 2
Bright or Dark Dots (3 adjacent): 0
Minimum distance between defects: 15mm (bright to bright dots)
Minimum distance between defects: 5mm (dark to dark dots)

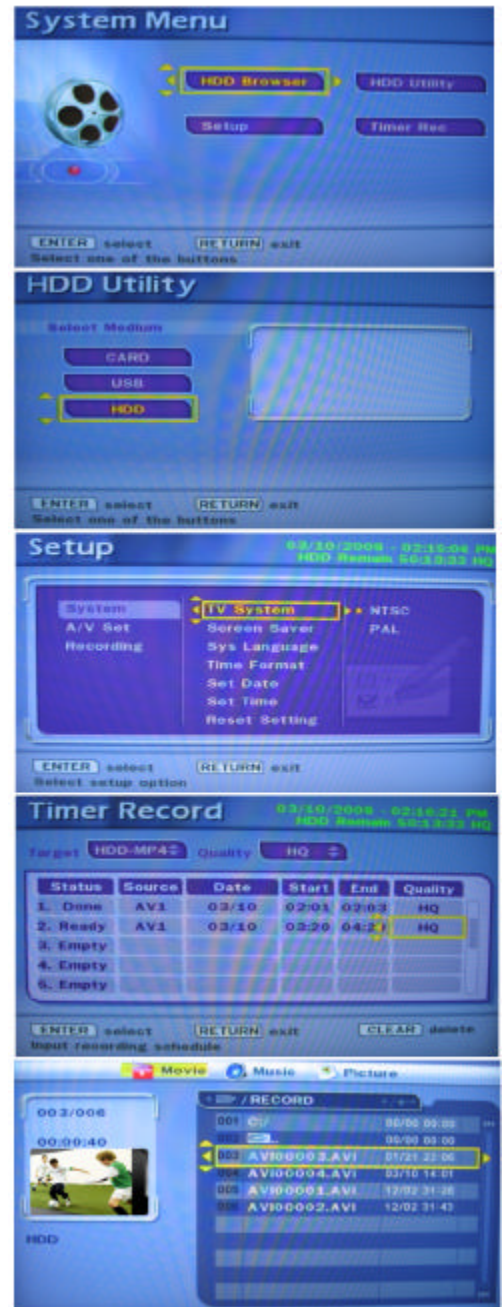

ALLEN AVIONICS, INC.

All specifications are subject to change without notice. Descriptions, photographs and displays are for reference only. Actual products may vary. All displays are simulated.

255 East Second Street. Mineola. NY 11501 • Tel: (516) 248-8080 • Fax: (516) 747-6724 • www.allenavionics.com